


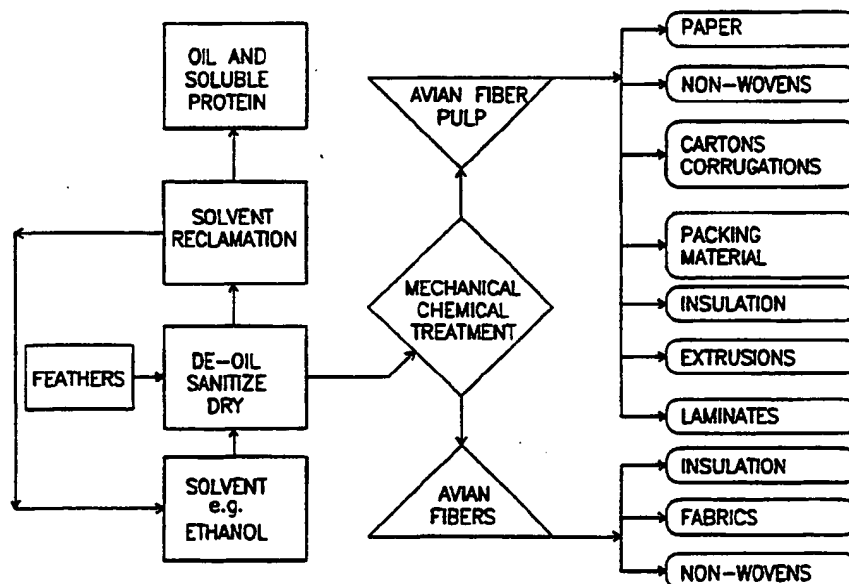

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : D01C 3/00, D06M 19/00	A1	(11) International Publication Number: WO 95/18252 (43) International Publication Date: 6 July 1995 (06.07.95)
(21) International Application Number: PCT/US94/14246 (22) International Filing Date: 12 December 1994 (12.12.94) (30) Priority Data: 08/175,077 29 December 1993 (29.12.93) US (71) Applicant: THE UNITED STATES OF AMERICA, represented by the Secretary of Agriculture [US/US]; Washington, DC 20250 (US). (72) Inventors: SCHMIDT, Walter, F.; 4226 18th Street, N.W., Washington, DC 20011 (US). LINE, Michael, J.; 10403A 46th Avenue #305, Beltsville, MD 20705 (US). GASSNER, George, III; 9216 Ispahan Loop, Laurel, MD 20708 (US). (74) Agents: PENDORF, Stephan, A. et al.; Suite 400, 3030 North Rocky Point Drive West, Tampa, FL 33607-5904 (US).		(81) Designated States: AU, BR, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: FIBER AND FIBER PRODUCTS PRODUCED FROM FEATHERS

**(57) Abstract**

A wide variety of end products may be manufactured from fibers or fiber pulp derived from feathers. Examples of such end products are paper and paper-like products, non-woven and woven fibers, insulation, filters, extrusions, and composite sheets and plates.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

FIBER AND FIBER PRODUCTS PRODUCED FROM FEATHERS

BACKGROUND OF THE INVENTIONField of the Invention

With the advent of increased poultry consumption both in the United States and abroad, increased poultry production has resulted in a concomitant increase in the amount of waste products for disposal by poultry producers. This invention relates to an article of manufacture and a manufacturing process which utilizes one of these waste products, feathers, in the production of fiber. The fiber is subsequently utilized in a wide-ranging variety of end products.

Description of the Prior Art

Currently, feathers are a waste product for which disposal is difficult. For example, the feathers may be hydrolyzed, then dried and ground to a powder to be used as a feed supplement for a variety of livestock, primarily chickens. It is a fairly expensive process, however, and results in a protein product of low quality for which the demand is low. Other disposal means such as burning or burying are also occasionally utilized, but these methods are considered environmentally unsound and are therefore largely prohibited.

There have been no reports of any useful products manufactured from feathers or of any other useful purpose which they might serve. Therefore, the instant invention not only provides novel products and procedures but also solves an environmentally sensitive problem of waste disposal.

Recognizing feather waste as a potential source of useable fiber, studies were begun to demonstrate and develop that usefulness by making commercially viable products. The initial project involved making paper from feather fiber pulp, which provided an additional environmental advantage. The increasing fiber demand by paper product users has placed a great demand on plant resources since paper products are composed primarily of cellulose. Generally paper pulp is prepared from plants by mechanically and/or chemically macerating the plant form to yield its component fibers which are subsequently collected and processed into pulp. The pulp is then utilized for the production of paper and paper products. Therefore, in addition to alleviating a

significant waste management problem, the invention also provides a means for reducing the pressure on forests as the sole source of the raw materials needed for the myriad paper products manufactured today. The invention provides an alternative source of these materials with considerably less waste and processing than occurs from wood-based sources. With a shift to feather utilization for useful products, feathers become a major poultry by-product instead of an environmentally difficult disposal problem.

SUMMARY OF THE INVENTION

We have discovered a method of utilizing feathers to make fibers and fiber pulp, useful for the manufacture of a wide variety of end products. In accordance with this discovery it is an object of the invention to provide a method of making fibers and fiber pulp from feathers.

It is an additional object of the invention to provide novel fiber and fiber products derived from feathers.

Other objects and advantages of the invention will become readily apparent from the following description.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a schematic drawing showing the basic steps of making fibers from feathers and some uses for the fiber and fiber pulp compositions.

DETAILED DESCRIPTION OF THE INVENTION

Feathers can be utilized to make fibers which are an alternative to existing fiber types such as cellulose, silk and organic polymers. A wide variety of products may then be produced by utilizing the fibers either alone or in formulations with other fibers to form the raw material for the manufacture of a variety of end products including, but not limited to, insulation, fabrics and filters. The fibers can be strengthened by the addition of adhesives, binders, sizing agents and otherwise modified by other additives such as dyes, mordants, whiteners or redox reagents. The fibers of the invention are advantageous because of their ready availability and natural abundance. In addition, physical properties of fibers or fiber mixtures are easily varied according to the length or composition of the fibers or fiber mixtures. For

example, structurally, feather fibers have naturally-occurring nodes approximately 50 microns apart. These nodes are potential cleavage sites for producing fibers of uniform 40-50 μm lengths. In addition, feathers from different species vary in length: poultry feather fibers are approximately 2 cm in length while those derived from exotic birds such as peacocks or ostriches are 4 to 5 cm or longer. Feather fibers are also thinner than other natural fibers resulting in products having a smooth, fine surface.

Feathers from any avian species may be utilized since feathers from all avian sources have the characteristics which are necessary for the production of useful fibers. Feathers are made up of many slender, closely arranged parallel barbs forming a vane on either side of a tapering hollow shaft. The barbs have bare barbules which in turn bear barbicels commonly ending in hooked hamuli and interlocking with the barbules of an adjacent barb to link the barbs into a continuous vane. Feather waste consists of insoluble fiber, soluble protein, fat and water. The insoluble fiber portion of the feather consists primarily of the proteins keratin and collagen.

While not wishing to be bound by any particular treatment method, feathers treated according to the scheme presented in Fig. 1 are effective for use in the production of fibers useful according to the invention. Feathers from any avian source are useful in the practice of the invention; however, since chickens are the major source of currently available feathers, the invention will be described with respect to chicken feathers. The method comprises five basic steps:

- a) collecting new feathers;
- b) washing the feather in an organic solvent,
- c) repeating the washing step,
- d) drying the feathers and
- e) removing fibers from feather shafts.

After collection, raw feathers are treated to remove oil or fat as well as to sanitize and partially dehydrate the fibers. Washing with agitation is carried out in an organic solvent, preferably a polar organic solvent such as about 95% ethanol, for about one hour, in approximately 1.0 to 1.5 gallons of solvent per pound of feathers. Lower solvent/solid ratios with more efficient agitation may be adjusted as deemed necessary for effective oil

removal. In addition, a surfactant, such as polysorbate 80, may also be included in the wash solution at about 0.5% (v/v).

After removal from the first solvent, a second wash step is carried out to remove soluble protein and to further sanitize the feathers. Washing in an ethanol wash (about 70%) or other organic solvent or bactericidal agent (e.g., a sodium azide solution) and/or mixture, in approximately 1.0 to 1.5 gallons solvent per pound feather waste, for about an hour has been found effective. The feathers are then drained or otherwise separated from the solvent. Any residual solvent is removed by drying, such as in a forced air oven at a temperature range of about 60 to about 120°C for about 6 hours, depending on the efficiency of the oven. Other comparable drying techniques may also be utilized.

Following the washing steps, fibers are removed from the feather shaft using mechanical shredding or shearing. Fiber length, particle size and particle distribution criteria determine which of the proper shredding devices should be used. For example, linters produce long fibers (about 2.5 cm), Waring blenders produce medium length fibers (about 1.5 cm), and Wiley mills produce a range of short fiber lengths (<1.5 cm). The use of these devices for the preparation of fibers from other sources is well-known and within the level of ordinary skill in the art. They may be utilized for the preparation of fibers from feathers with little or no modification in known procedures.

The feather fibers and shafts may be separated using linters (as described by Temming and Grunert. Temming-Linters: Technical Information on Cotton Cellulose. 1973. Peter Temming AG, Gluckstadt, herein incorporated by reference) or other mechanical separation techniques depending on the ultimate use of the fibers. The presence of shaft material in the mixture provides a more granular, bulkier, light-weight material, such as would be preferable for fillers. On the other hand, its removal results in smoother, denser products.

The fibers can be further treated by mechanical beating, for example with a Hollander beater, until the fibers are soft, pliable and supple. Variations in these properties as well as fiber length can be achieved as desired by modifying the beating and compression conditions. Alternatively, fibers may be subjected to chemical treatment with redox reagents such as 10% hydrogen peroxide for

about 1 hour. At this point, they may be utilized for the production of products or further treated to produce pulp.

Coarse insulation can be produced from fibers obtained by shearing feathers, with both shafts and barbules present in the mixture. Fine insulation suitable for garments can be produced by removing the shaft material. Separating the shaft from barbule material also provides non-woven fibers useful, for example, in filter columns. Open-ended containers are packed with the fibrous material which is held in place by screens or membranes at either end. In addition, textiles are produced by spinning barbules into threads which are subsequently woven into fabric.

Fiber pulp is obtained by combining fibers with water and/or other wetting agents or additives selected so as to tailor the final product according to its ultimate use. Products of different types and qualities can be produced from the pulp by varying the particular additives utilized. Acceptable wetting agents are ionic and non-ionic surfactants, such as sodium dodecylsulfate and polysorbate 80.

Fiber pulp slurries are produced by mixing the pulp with water and/or other wetting agents in an amount sufficient for intended use. These slurries can then be adjusted to consistencies favorable for a variety of applications including extrusions, and the pressing and forming of objects of various shapes and sizes, e.g. trays, containers, vessels, tubes, frames or masts. Slurries can also be rolled and compressed into sheets and plates similar to particle board. Combination with appropriate foaming agents, such as Porofo[®] BSH, will produce a variety of lightweight filling materials for padding, packing and insulating. Fiber pulp slurries may also be used in the manufacture of non-woven fibers such as selective filters and general adsorbents.

Additives such as mordants and dyes (e.g., titanium dioxide and iron oxide); binders (e.g., starch and casein); foaming agents; hardeners; chemical sizing agents (e.g., a ketene dimer emulsion); fillers; and other plant (e.g., kenaf, cotton rag, wood cellulose) or animal (e.g., collagen) fibers may be used. These agents are known to those of skill in the art and can be varied according to the requirements for the ultimate product. Chemical cross-linking, wetting and/or redox reagents may also be utilized as needed.

Existing techniques and technologies may be utilized to manufacture the products of interest. The procedures are well-known in the art, and the fiber pulp described fits directly into productions schemes already established. Paper products are made as outlined by Smook, G.A. (Handbook for Pulp & Paper Technologists. 1989. Canadian Pulp and Paper Association, Montreal) or Clark, J d'A. (pulp Technology and Treatment for Paper, 2nd ed. 1985. Miller Freeman Publications, Inc., San Francisco) for printing grades, industrial grades, specialty grades and tissue paper. Corrugated materials such as cardboard are made directly from paper products in existing corrugation machinery according to Higham, R.R.A. (A Handbook of Paperboard and Board. 1970. Vol.I: Manufacturing Technology; and 1971. Vol. II: Technology of Conversion and Usage, Business Books Limited, London) or Chamberlain, M.R. and Bowler, J.F. (Dictionary of Converting. 1992. Blackie Academic & Professional, London). Fiber pulp slurry is adjusted to consistencies effective for extrusion or pressing and forming various shaped and sized objects such as trays, containers, vessels, tubes, frames or masts according to Higham or Chamberlain and Bowler, supra. Fiber pulp is rolled and compressed into sheets and plates such as particle board. Fiber pulp is combined with appropriate foaming agents to produce a variety of light weight filling materials for padding, packing and insulating. Fiber pulp can also be used to manufacture selective filters and general adsorbents as described by Nachinkin, O.I. (Polymeric Microfilters. 1991. Ellis Horwood, New York).

The following examples are intended only to further illustrate the invention and are not intended to limit the scope of the invention as defined by the claims.

EXAMPLES

Example 1

Preparation of Fibers

Ten grams of feathers are washed and sanitized in 500 ml 95% ethanol with agitation for one hour. The washed feathers are removed from the wash solution and further washed and sanitized in 500 ml 70% ethanol for one hour. After draining off the second wash solution, the feathers are dried, then passed through a

commercial Wiley mill containing a 10 mesh screen. The resulting material is then passed through the Wiley mill containing a 20 mesh screen.

Example 2

Preparation of Fiber Pulp

About 5 g commercial casein glue (Elmer's Glue, Borden Co., Columbus OH) is added to 5 g water and mixed, followed by the addition of 10 g ethanol. The solution is sonicated to remove air bubbles and mixed with 10 g fibers prepared as described in Example 1 to form a fiber pulp slurry.

Example 3

Preparation of Paper from Fiber Pulp

A slurry prepared according to Example 2 is spread evenly over a thin 12" x 12" polyethylene plastic sheet overlaid onto an 11" x 11" x 1/4" plexiglass plate with a spatula, tamped even with a 12" x 1" x 1/8" straight-edge, and allowed to air dry overnight. A mist of ethanol is sprayed onto the sheet, and the sheet is allowed to dry under about 0.5 to 10 ton pressure per square inch in a hydraulic press between two polyethylene lined plexiglass sheets. After pressing, the polyethylene sheets are removed from the product. This process is sufficient to produce an 8 1/2" x 11" sheet of paper.

Example 4

Preparation of Composite from Fiber Pulp

After washing, sanitizing and drying as described in Example 1, 5 g feathers are placed in a high speed commercial Waring blender and sheared for 2.5 min. A shaft-free fraction of fiber is obtained by passing the mixture through a small 6" fan blowing into a 2' x 2' x 10' box made of household screening. Fiber which carries more than 8' is collected. One pound of this fiber fraction is placed in a Hollander beater containing about 0.5 ml Tween in 20 gal water and beaten for 3 hrs. The beaten fiber pulp slurry is collected. [NOTE: Optionally the fiber is chemically treated with hydrogen peroxide to further whiten the fibers and to enhance the pulp-like properties of the fiber.] The sample is dried overnight in a forced-air oven at 105°C. About 8 g dried

fiber pulp is beaten with 2 g kenaf, 0.5 g casein glue solution and 300 ml water in a Waring blender for 5 min. The pulp slurry is poured onto a thin 12" x 12" polyethylene plastic sheet and overlaid onto an 11" x 11" x 1/4" plexiglass plate. The slurry is spread evenly over the polyethylene sheet with a spatula and tamped even with a 12" x 1" x 1/8" straight-edge. The slurry is allowed to air dry overnight. A mist of ethanol is sprayed onto the sheet, and the sheet is allowed to dry under about 0.5 - 10 ton pressure per square inch in a hydraulic press between two polyethylene lined plexiglass sheets. The polyethylene is removed from the product, a flat composite sheet of feather/kenaf fiber.

While the above Examples describe procedures carried out by hand, mechanized procedures are preferable for mass production. These procedures are described in the above-cited references, all of which are herein incorporated by reference, and fiber and fiber pulp compositions may be utilized in these procedures with little or no modification.

We claim:

1. Fibers derived from feathers.
2. A composition comprising fibers derived from feathers.
3. The composition of claim 2, wherein said fibers have been subjected to treatment to render them soft and pliable, wherein said treatment is beating or chemical treatment with redox reagents, wherein said redox reagent is preferably hydrogen peroxide, and wherein said composition preferably additionally comprises additives selected from the group consisting of adhesives, binders, sizing agents, dyes, mordants and whiteners.
4. A composition comprising fiber pulp, wherein said fiber pulp comprises fiber derived from feathers and water or wetting agents.
5. The composition of claim 4, wherein said fiber pulp comprises fiber derived from feathers, water and wetting agents, and wherein said composition preferably additionally comprises additives selected from the group consisting of mordants, dyes, binders, foaming agents, hardeners, chemical sizing agents, fillers, plant fibers and animal fibers.
6. A method of making fiber from feathers, said method comprising:
 - a) collecting raw feathers,
 - b) washing said feathers in an organic solvent, preferably ethanol, said ethanol preferably being about 95% ethanol, said solvent preferably additionally comprising a solvent, preferably for about one hour,
 - c) repeating said washing step, preferably in an organic solvent, said organic solvent preferably being ethanol, said ethanol preferably being about 70% ethanol,
 - d) drying said feathers, and
 - e) removing fibers from feather shafts.
7. The method of claim 6, wherein said washing step b) is carried out at a ratio of about 1.0 to about 1.5 gallons of organic solvent to one pound of feathers.
8. The method of claim 6, wherein said organic solvent is a bactericidal agent, preferably sodium azide solution.
9. The method of claim 6, wherein said washing step c) is carried out in a mixture of ethanol and bactericidal agent, and/or said washing step c) is carried out at a ratio of about 1.0 to about 1.5 gallons of solvent to one pound of feathers, and/or said drying

step is carried out by drying said fibers at about 60°C to about 120°C.

10. The method of claim 6, wherein said fibers are removed from feather shafts by mechanical shredding or shearing, preferably including a step of separating fiber material from shaft material after the removal of fibers from shafts, and/or subjecting the fibers to treatment to render them soft and pliable, said treatment preferably being beating or chemical treatment with a redox reagent, wherein said redox reagent is preferably hydrogen peroxide.

11. A method of making fiber pulp, said method comprising mixing fibers derived from feathers with an effective amount of water or wetting agents.

12. A method of making fiber pulp, said method comprising mixing fibers derived from feathers with an effective amount of water and wetting agents.

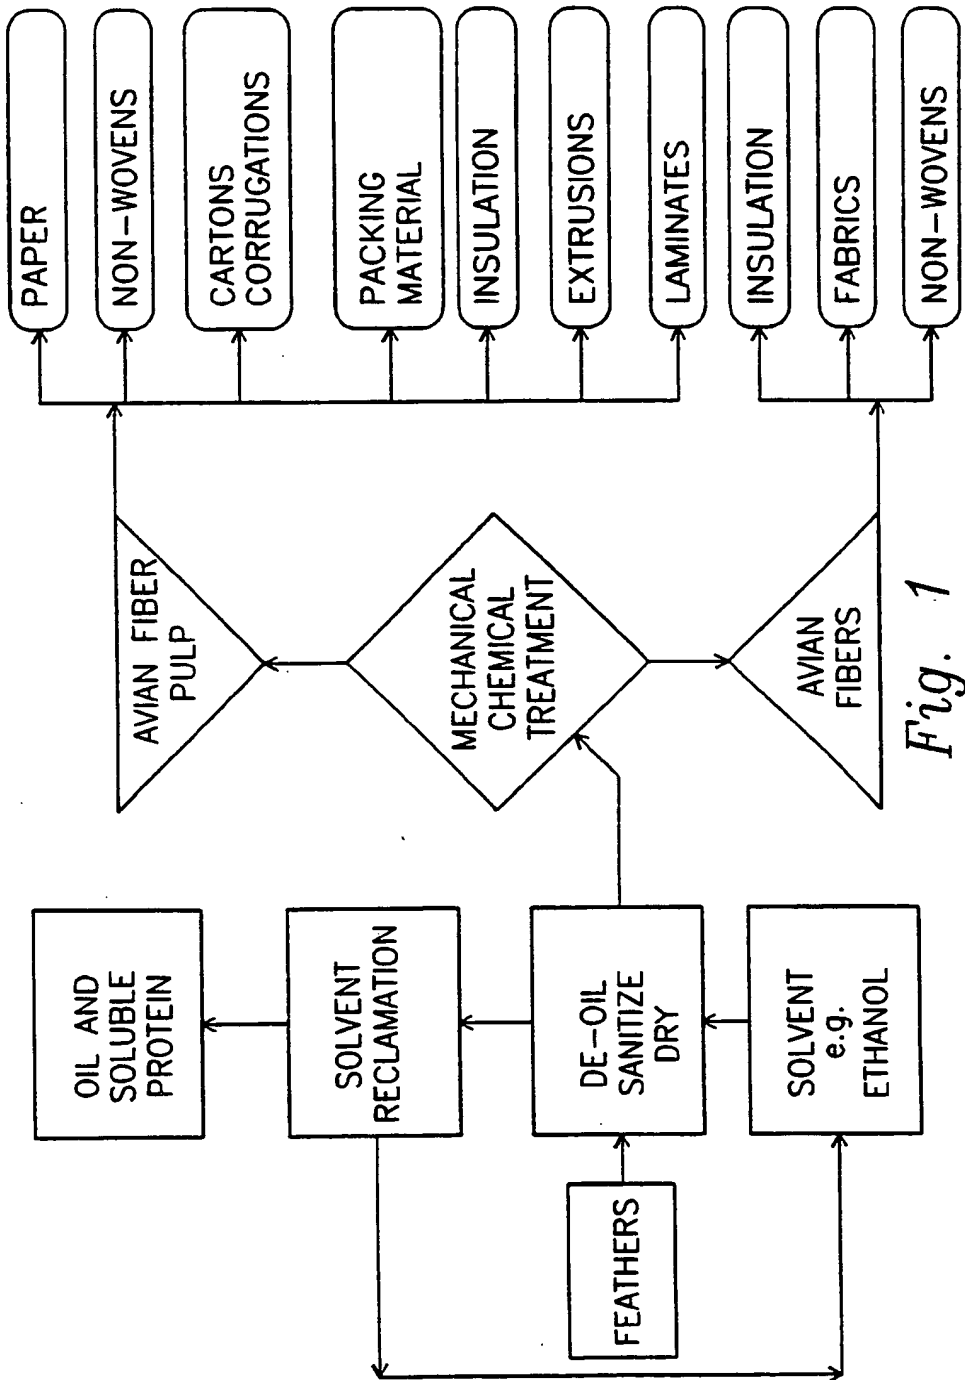


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/14246

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :D01C 3/00; D06M 19/00
US CL :162/2; 8/94.1 R, 139.1; 19/4

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 162/2; 8/94.1 R, 139.1; 19/4

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS, DIALOG,
Search terms: fib#### from feathers, plumage?, wash###

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 2,809,400 (MALTENFORT) 15 October, 1957, Entire document.	1-12
Y	US, A, 4,169,706 (KRUCHEN) 02 October 1979, Entire document.	1-12
A	US, A, 2,706,143 (FLORIO) 12 April 1955.	1-12

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A document defining the general state of the art which is not considered to be part of particular relevance	* X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* E earlier document published on or after the international filing date	* Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
* L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* Z document member of the same patent family
* O document referring to an oral disclosure, use, exhibition or other means	
* P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

17 FEBRUARY 1995

Date of mailing of the international search report

31 MAR 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOSE A. FORTUNA

Telephone No. (703) 305-7498